





CDIS-46 Option Interface Card

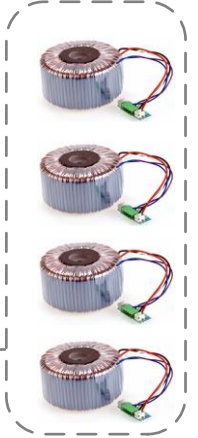

RS232
Interface




46-120 w/CDI-46 Option Card Fitted
4-Zone Mixer/Amplifier

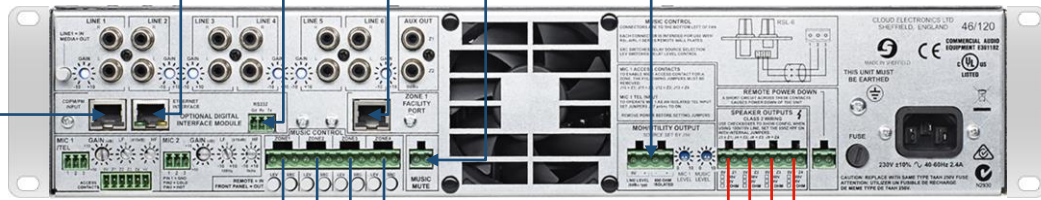

CAT5 - Paging Mic
Audio/Control

CAT5 - Analogue Contact Closure

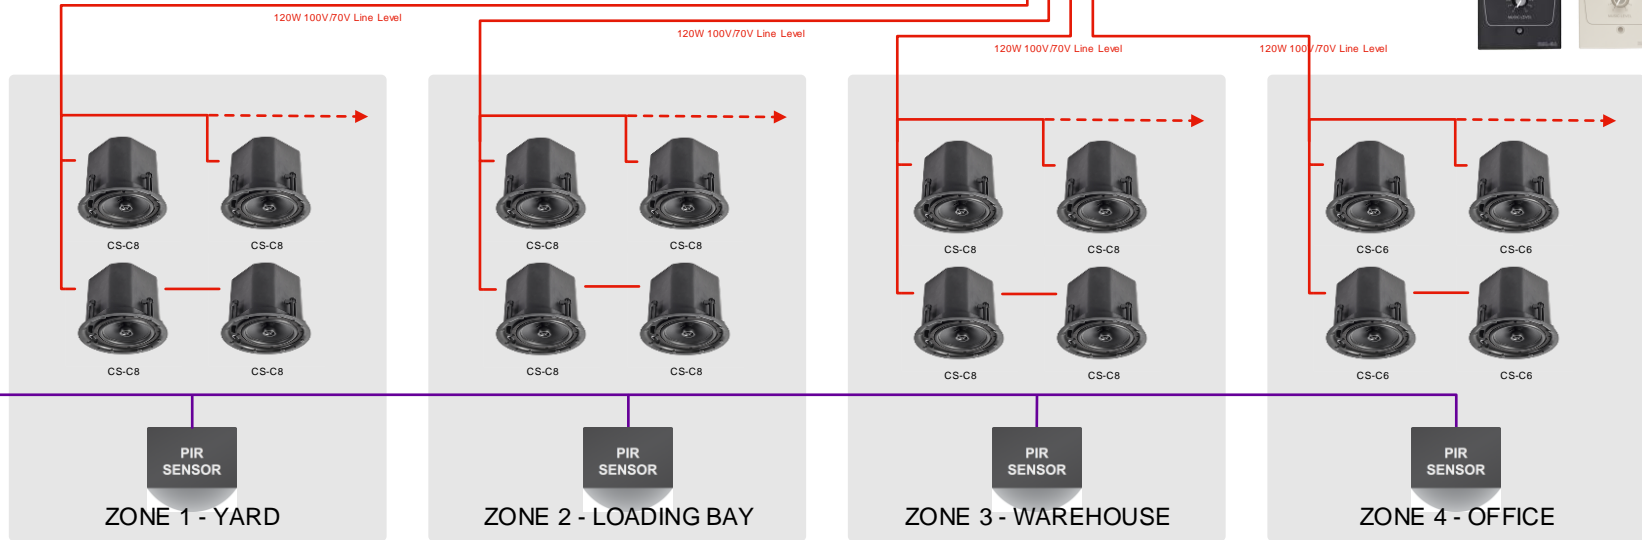

Industrial Application (using all the 46-120 Features)

46-120 with all possible options displayed.
The PM4/8-SA Multi-Zone Paging Microphones with built-in MP3 Message Announcer can be used in conjunction with an external trigger device such as a Infrared motion sensor (PIR)- this enables fully automatic announcement of customised security announcements and chimes.

